

Isotopic Tracing of Particulate Matter from a Compression Ignition Engine Fueled with Ethanol-in-Diesel Blends

A.S. Cheng, R.W. Dibble and B. Buchholz

This article was submitted to
219th American Chemical Society Meeting
San Francisco, CA
March 26-30, 2000

U.S. Department of Energy

Lawrence
Livermore
National
Laboratory

November 22, 1999

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

This report has been reproduced
directly from the best available copy.

Available to DOE and DOE contractors from the
Office of Scientific and Technical Information
P.O. Box 62, Oak Ridge, TN 37831
Prices available from (423) 576-8401
<http://apollo.osti.gov/bridge/>

Available to the public from the
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Rd.,
Springfield, VA 22161
<http://www.ntis.gov/>

OR

Lawrence Livermore National Laboratory
Technical Information Department's Digital Library
<http://www.llnl.gov/tid/Library.html>

Isotopic tracing of particulate matter from a compression ignition engine fueled with ethanol-in-diesel blends

Adelbert S. Cheng¹, Robert W. Dibble¹, and Bruce Buchholz². (1) Department of Mechanical Engineering, University of California, Berkeley, 50-B Hesse Hall, M/C 1740, Berkeley, CA 94720, fax: 510-642-1850, ascheng@newton.me.berkeley.edu, (2) Center for Accelerator Mass Spectrometry, Lawrence Livermore National Laboratory, P.O. Box 808, L-397, Livermore, CA 94551

Accelerator Mass Spectrometry (AMS) was used to investigate the relative contribution to diesel engine particulate matter (PM) from the ethanol and diesel fractions of blended fuels. Four test fuels along with a diesel fuel baseline were investigated. The test fuels were comprised of ¹⁴C depleted diesel fuel mixed with contemporary grain ethanol (>400 the ¹⁴C concentration of diesel). An emulsifier (Span 85) or cosolvent (butyl alcohol) was used to facilitate mixing. The experimental test engine was a 1993 Cummins B5.9 diesel rated at 175 hp at 2500 rpm. Test fuels were run at steady-state conditions of 1600 rpm and 210 ft-lbs, and PM samples were collected on quartz filters following dilution of engine exhaust in a mini-dilution tunnel. AMS analysis of the filter samples showed that the ethanol contributed less to PM relative to its fraction in the fuel blend. For the emulsified blends, 6.4% and 10.3% contributions to PM were observed for 11.5% and 23.0% ethanol fuels, respectively. For the cosolvent blends, even lower contributions were observed (3.8% and 6.3% contributions to PM for 12.5% and 25.0% ethanol fuels, respectively).

Work was performed in part under the auspices of the Department of Energy at Lawrence Livermore National Laboratory under contract W-7405-ENG-48.

ISOTOPIC TRACING OF PARTICULATE MATTER FROM A COMPRESSION-IGNITION ENGINE FUELED WITH ETHANOL-IN-DIESEL BLENDS

A. S. (Ed) Cheng¹, Robert W. Dibble¹, Bruce A. Buchholz²

¹Department of Mechanical Engineering, University of California, Berkeley, CA

²Center for Accelerator Mass Spectrometry, LLNL, Livermore, CA

KEYWORDS: diesel particulate matter, oxygenate, isotope tracing, AMS

INTRODUCTION

Environmental and human health concerns over emissions from internal combustion engines continue to bring about increasingly stringent emissions standards and drive research into the use of non-conventional, cleaner-burning fuels. For compression-ignition (diesel) engines, oxygenated fuels have been shown to dramatically reduce particulate matter (PM) while also improving or maintaining acceptable levels of other regulated emissions (NO_x, HC and CO) [1-8]. The mechanisms through which oxygenates reduce PM, however, are not fully understood. In addition to changes in combustion chemistry, the influence of thermophysical properties on fuel injection and fuel-air mixing can play a significant role.

To gain further insight into the effect of oxygenates on diesel engine PM emissions, Accelerator Mass Spectrometry (AMS) was used to investigate the relative contribution to soot (the carbonaceous component of PM) from the ethanol and diesel fractions of blended fuels. AMS counts electrostatically accelerated nuclei (32.5 MeV for ¹⁴C⁴⁺) in a simple particle detector [9]. Molecular isobars are completely disassociated in the charge changing process and any atomic isobars are discriminated in the detector. AMS is particularly efficient in detecting long-lived isotopes ($10\text{ y} < t_{1/2} < 100\text{ My}$). The rarity of long-lived radioisotopes yields a much lower background than that achievable with stable isotopes. For example, the naturally occurring carbon isotopic abundances are: ¹²C (98.9%), ¹³C (1.1%), and ¹⁴C ($1.2 \times 10^{-10}\%$). The natural background of ¹⁴C is 10 orders of magnitude lower than the rare stable isotope ¹³C and AMS achieves limits of quantitation for ¹⁴C below 1×10^{-18} mol in individual samples (LOQ < 1 amol ¹⁴C / mg C). The decrease in background yields much greater sensitivity for ¹⁴C AMS over ¹³C MS. Decay counting long lived isotopes is not efficient; counting 0.1% of the decays of a ¹⁴C sample takes 8.3 years.

MATERIALS AND METHODS

In this study, contemporary grain ethanol (109 amol ¹⁴C/mg C) served as an isotopic tracer in old carbon diesel fuel (0.26 amol ¹⁴C/mg C). The ethanol was manufactured by Midwest Grain Products, Pekin, IL. The diesel was a CARB-certified No. 2 diesel fuel obtained from Golden Gate Petroleum, Hayward, CA. Properties of ethanol and the diesel test fuel are shown in Table 1. Because ethanol is soluble in diesel fuel in only small quantities, either an emulsifier (Span 85, also known as sorbitan trioleate) or a cosolvent (n-butanol) was used to prepare the ethanol-in-diesel blends. An ignition improver, di-tert-butyl peroxide (DTBP), was also used to compensate for the low cetane number of ethanol. The Span 85 and n-butanol were obtained from Spectrum Quality Products, Inc.; the DTBP was obtained from Pfaltz & Bauer. All fuel blend components were converted to AMS samples [10] and ¹⁴C content was measured. The four different ethanol-in-diesel blends investigated are shown in Table 2. A high-speed, high-shear mixer (Greerco Model 1-LV Homomixer) was used to prepare the emulsified blends.

The experimental test engine is a 1993 Cummins B5.9 rated at 175 hp (131 kW). Engine specifications are listed in Table 3. The engine employs a mechanically-governed in-line fuel injection pump capable of injection pressures up to 115 MPa. No modifications were made to the test engine to optimize for operation on the test fuels.

Table 1. Ethanol and diesel fuel properties.

Fuel	Ethanol ^a	Diesel
Density (kg/L)	0.7923	0.8473
Cetane number	<5	49.1
Sulfur (ppm)	-	98
SFC total aromatics (wt. %)	-	16.32
SFC PNA's (wt. %)	-	4.09
Nitrogen	-	< 5 ppm
Boiling point (°C)	78	-
Distillation by D86 (°C)		
IBP	-	173
10%	-	237
50%	-	299
90%	-	336
95%	-	347
EP	-	358
Lower heating value (MJ/L)	21.2	35.4

^a from literature sources

^b as determined by fuel analysis

Table 2. Test fuel blends (components listed in percent by volume).

Fuel Blend	Diesel	Ethanol	SPAN 85	n-butanol	DTBP
A	72.0	23.0	4.0	-	1.0
B	70.0	25.0	-	4.0	1.0
C	83.5	11.5	4.0	-	1.0
D	82.5	12.5	-	4.0	1.0

Table 3. Cummins B5.9 engine specifications.

Model year	1993
Displacement	5.88 liters (359 in ³)
Configuration	6-cylinder inline
Bore	102 mm (4.02 in)
Stroke	120 mm (4.72 in)
Compression ratio	17.6:1
Horsepower rating	175 hp @ 2500 rpm
Torque rating	420 ft-lb @ 1600 rpm
Aspiration	turbocharged and aftercooled
Injection timing (fixed)	11.5° BTDC

Prior to beginning any experiments, lab facilities were checked for fixed and aerosol ¹⁴C contamination with AMS analyzed swipes and fullerene aerosol monitors. During the experiments, a steady-state engine speed-load condition of 1600 rpm and 210 ft-lbs (285 N-m) was used and measurements were made for PM, NO_x, HC and CO emissions, as well as for fuel consumption. Gaseous emissions (NO_x, HC and CO) were monitored using Horiba Instruments emissions analyzers and fuel consumption was measured via a load cell mounted under the fuel tank. PM was determined using a mini-dilution tunnel and gravimetric filter paper measurements. The filters (Pallflex Tissuquarz 2500QAT-UP) were conditioned overnight in petri dishes and weighed before and after PM loading on a Mettler UM3 microbalance. Filters were then sealed in plastic bags prior to preparation as AMS samples. Because of the limited quantity of contemporary grain ethanol obtained and time needed to collect sufficient PM mass for AMS analysis (~ 30 min. of engine operation), only one sample was collected for each test fuel.

In preparation for AMS analysis, the filters with collected PM were baked at 900 °C for 2 h prior to use to remove carbon residue and stored in sealed plastic bags after cooling. Filters were cut into 2 or 3 pieces and converted to graphite for AMS measurement of isotope ratios [10]. Isotope ratios were measured to within 1-8%. Relative uncertainties were governed primarily by counting statistics. The samples with very low ¹⁴C content had larger uncertainties. AMS measures the isotope concentration of unknown samples relative to those of known standards. In these experiments we normalized to four identically prepared standards of Australian National University Sucrose [11].

RESULTS AND DISCUSSION

Brake-specific emissions and fuel consumption results from the baseline diesel fuel and the four test fuel blends are shown in Table 4. A graphical representation of PM and NO_x emissions is shown in Figure 1. As anticipated, the general trend was towards lower PM emissions with higher levels of oxygenate (note that the cosolvent n-butanol is itself also an oxygenate), although an anomaly exists in that fuel blend C produced a 10% increase in PM. The data also indicates that the homogeneous cosolvent blends are more effective at reducing PM emissions compared to the emulsified blends. NO_x emissions from the ethanol-in-diesel blends were 22% to 27% lower than that of the baseline diesel and did not show large variation across the different blends. Emissions of both HC and CO increased, but remained very low as is typical with diesel engine combustion. Fuel consumption was higher with the test fuel blends due to the lower energy density of ethanol.

Table 4. Brake-specific emissions and fuel consumption results (g/kW-hr).

FUEL	Diesel	Blend A	Blend B	Blend C	Blend D
PM	0.032	0.025	0.012	0.035	0.029
NOx	6.28	4.58	4.90	4.92	4.88
HC	0.084	0.160	0.172	0.203	0.224
CO	0.312	0.517	0.625	0.358	0.371
bsfc	230	249	270	261	256

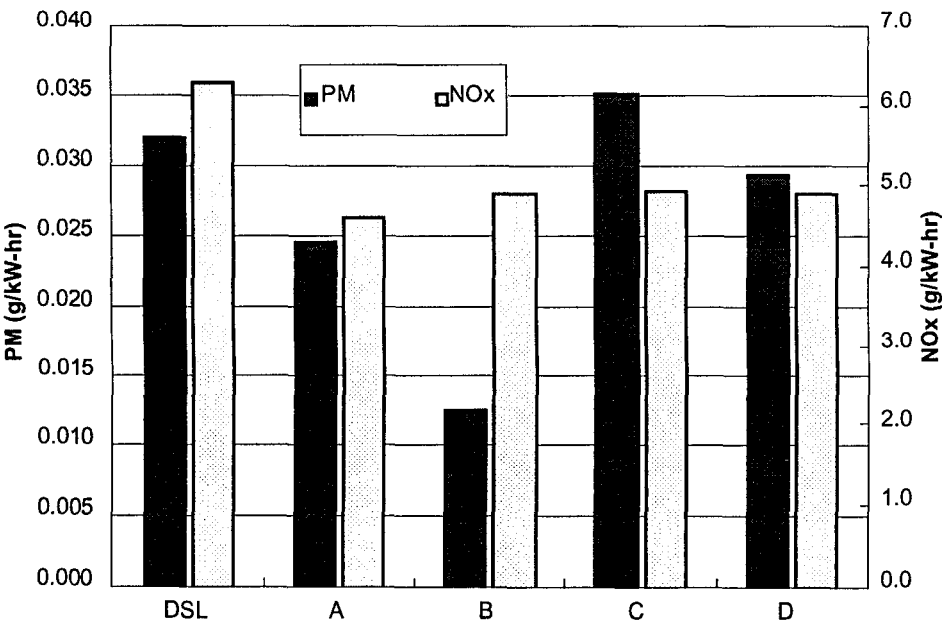


Figure 1. Brake-specific emissions of PM and NO_x.

Isotope ratios of the fuel components are reported in Table 5. The ¹⁴C content of the petroleum derived components are low as expected. The emulsifier, Span 85, has a contemporary ¹⁴C content, indicating it is derived from biological products.

Table 5. Carbon-14 content of fuel components.

brake-specific emissions data, this suggests that the chemical mechanisms that inhibit soot formation and/or promote soot oxidation are different depending on the nature in which ethanol is blended with the diesel fuel.

Table 6. Contributions of ethanol to carbon soot mass. Fuel blends A and C used the emulsifier Span 85 while Blends B and D used n-butanol as a cosolvent.

Fuel blend	Ethanol volume % (fuel)	Ethanol carbon mass % (fuel)	Ethanol carbon mass % (soot)
A	23.0	15	8.6
B	25.0	16	6.3
C	11.5	7	4.7
D	12.5	8	3.8

CONCLUSIONS

Gravimetric filter paper measurements and isotopic tracing of PM reveal that ethanol-in-diesel blends reduce PM emissions from compression-ignition engines in a manner which results in a lower ethanol contribution to soot relative to its fraction in the fuel blend. Experimental results also indicate that homogeneous blends of ethanol and diesel behave differently than emulsified blends and yield lower PM emissions.

This study also demonstrated the power of using AMS to perform isotope tracing without using any specially labeled material. No radioactive material was used in any part of these experiments. Therefore, no mixed wastes (radioactive and hazardous) were generated, greatly simplifying disposal [12]. In practice, one could label any fuel additive or component and follow its fate in particulate emissions or exhaust gases. The sub-attomole sensitivity of ¹⁴C-AMS can be used to separate components of exhaust gases (e.g., hydrocarbons, CO, CO₂) and quantify fuel stock contributions. Particulate separators can also be used to look at the fate of fuel components in different sized soot emissions.

ACKNOWLEDGEMENTS

Support was provided by a LLNL Center for Accelerator Mass Spectrometry Mini-grant. Work completed at LLNL was supported under DOE contract W-7405-ENG-48.

REFERENCES

1. Cheng, A. S. and R. W. Dibble. "Emissions Performance of Oxygenate-in-Diesel Blends and Fischer-Tropsch Diesel in a Compression Ignition Engine," SAE paper 1999-01-3606, 1999.
2. Wong, G. et al. "Low Soot Emission from a Diesel Engine Fueled with Dimethyl and Diethyl Ether," WSS/CI paper 95F-162, October 1995.
3. Liotta, F. J. and D. M. Montalvo. "The Effect of Oxygenated Fuels on Emissions from a Modern Heavy-Duty Diesel Engine," SAE paper 932734, 1993.
4. Fleisch, T. et al. "A New Clean Diesel Technology: Demonstration of ULEV Emissions on a Navistar Diesel Engine Fueled with Dimethyl Ether," SAE paper 950061, 1995.
5. McCormick, R. L., J. D. Ross and M. S. Graboski. "Effect of Several Oxygenates on Regulated Emissions from Heavy-Duty Diesel Engines," Environmental Science & Technology, vol. 31, no. 4, 1997.
6. Bertoli, C., N. Del Giacomo and C. Beatrice. "Diesel Combustion Improvements by the Use of Oxygenated Synthetic Fuels," SAE paper 972972, 1997.
7. Miyamoto, N. et al. "Smokeless, Low NO_x, High Thermal Efficiency, and Low Noise Diesel Combustion with Oxygenated Agents as Main Fuel," SAE paper 980506, 1998.
8. Maricq, M. M. et al. "The Effect of Dimethoxy Methane Additive on Diesel Vehicle Particulate Emissions," SAE paper 982572, 1998.
9. Vogel, J. S., Turtletaub, K. W., Finkel, R., and Nelson, D. E. *Anal. Chem.* 1995, 67, A353-A359.
10. Vogel, J. S. *Radiocarbon* 1992, 34, 344-350.

COMPONENT	amol ¹⁴ C / mg C
Diesel	0.26
Ethanol	109
n-butanol	0.31
Span 85	109
DTBP	0.17

Measured isotope ratios (IR) contain contributions from all the components (and possibly more) shown in Eq. 1.

$$IR_{\text{sample}} = \frac{{}^{14}C_{\text{diesel}} + {}^{14}C_{\text{ethanol}} + {}^{14}C_{\text{absorbed}} + {}^{14}C_{\text{emulsifier}} + {}^{14}C_{\text{cos solvent}} + {}^{14}C_{\text{additives}}}{C_{\text{diesel}} + C_{\text{ethanol}} + C_{\text{absorbed}} + C_{\text{emulsifier}} + C_{\text{cos solvent}} + C_{\text{additives}}} \quad (1)$$

In practice we try to reduce the number of terms of this equation by limiting the number of components or rendering some terms negligible through judicious choice of compounds or experimental conditions. Through the use of appropriate controls we determined the contributions of the various components in Eq. 1. Traditional tracer experiments depend on radioactive decay for detection and are usually dominated by a highly labeled tracer with very small mass. In our case, the labeled tracer was not radioactive in the traditional sense and contributed a significant amount of carbon in the measured isotope ratio. We sought to determine the mass of tracer ethanol in the soot and need to consider the products of carbon mass and the isotope ratios. The total carbon mass is expressed in Eq. 2.

$$M_{\text{sample}} = M_{\text{diesel}} + M_{\text{ethanol}} + M_{\text{absorbed}} + M_{\text{emulsifier}} + M_{\text{cos solvent}} + M_{\text{additive}} \quad (2)$$

The product of the isotope ratio and carbon mass of each sample is the sum of the product of each component as described in Eq. 3.

$$IR_{\text{sample}} M_{\text{sample}} = \sum_{i=\text{component}} IR_i M_i \quad (3)$$

Equations 2 and 3 can be solved to determine the mass contributions of each component with knowledge of the isotope ratios of the components and a series of controls adding each component to the fuel mixture.

The isotope ratios of the filter samples loaded with PM from the fuel blends and the associated controls were elevated due to the absorption of atmospheric CO₂ and other carbon compounds on the soot during equilibration. Atmospheric CO₂ has approximately the same ¹⁴C content as ethanol, 109 amol ¹⁴C / mg C. The quantity of absorbed carbon depends on the surface area of the soot and length of time spent equilibrating in the atmosphere. It should scale with the mass of soot deposited on the filters when equilibration times are constant. Separate control blanks were collected for soot samples from fuel blends A and B and from blends C and D. Assuming that all the sorbed carbon was contemporary, the mass of carbon absorbed with the separate sets of filters were 2.4% and 4.2% for blends A and B and blends C and D, respectively. These values for mass fraction of absorbed atmospheric carbon were propagated in the soot samples obtained from the fuel blends and the controls that included emulsifier or cosolvent without the ethanol.

Equations 2 and 3 were used to solve for the fractional mass of carbon in the soot from the emulsifier and ethanol. The mass fraction of carbon in the soot was not measured so all isotope measurements are expressed as fractions of soot carbon rather than absolute numbers. Since the ¹⁴C content of the cosolvent and ignition improver were essentially the same as the diesel fuel, their contributions to the carbon soot mass could not be determined in our limited experiment. Either n-butanol or DTBP could be traced if desired, but we were not interested in obtaining isotope labeled material for this purpose. Our interest was primarily in tracing the ethanol. The contributions of the ethanol to the carbon mass in the soot is displayed in Table 6. Since the emulsifier is only 4% by volume in blends A and C, its contribution to the carbon mass is not large.

As the data in Table 6 shows, ethanol contributed less to soot than did the diesel in all of the test fuel blends. Results also indicate that the percent of fuel ethanol contributing to soot is higher for the emulsified blends A and C compared to the cosolvent blends B and D. Along with the

11. Polach, H. A., In *Proceedings of the 9th International Conference on Radiocarbon*; Berger, R., Suess, H., Eds.; UC Press: Berkeley/Los Angeles, CA, 1979; pp. 115-124.
12. 10 CFR 20.2005 *Fed. Reg.*, 1991, 56, 434.